



TEST REPORT

Product Name: AROMA DIFFUSER
Trademark: N/A
Model Number: KJR-041
020, 021, 080, 096, 099, 186, 029, 181, 101
Prepared For: Ningbo Glory King Imp&Exp Co., Ltd.
Address: 1343, No.55 Dongdu Road, Haishu District, Ningbo,Zhejiang Province,China.
Manufacturer: Ningbo Glory King Imp&Exp Co., Ltd.
Address: 1343, No.55 Dongdu Road, Haishu District, Ningbo,Zhejiang Province,China.
Prepared By: Shenzhen ZHT Testing Co., Ltd.
Address: 206,YongFu Buiding, YongFu Road, FuYong, Bao'an District, Shenzhen City, Guangdong P.R. China.
Sample Received Date: Jul. 03, 2023
Sample tested Date: Jul. 03, 2023 to Jul. 10, 2023
Issue Date: Jul. 10, 2023
Report No.: ZHT-20230696744E
Test Standards EN 55014-1:2017+A11:2020, EN 55014-2:2015
EN IEC 61000-3-2:2019, EN 61000-3-3:2013+A1:2019
Test Results PASS

Compiled by:

Icey Chen

Icey Chen

Reviewed by:

Eric Yang

Eric Yang



Zero Zhan/Manager

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen ZHT Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

**TABLE OF CONTENT**

Test Report Declaration	Page
1. VERSION	3
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION AND TEST SETUP	6
4.1 Product Information	6
4.2 Test Setup Configuration	6
4.3 Support Equipment	6
4.4 Test Mode	6
5. TEST FACILITY AND TEST INSTRUMENT USED	7
5.1 Test Facility	7
5.2 Test Instrument Used	7
6. DISTURBANCE VOLTAGES	9
6.1 Block Diagram Of Test Setup	9
6.2 Limit	9
6.3 Test procedure	9
6.4 Test Result	10
7. RADIATED DISTURBANCE TEST	12
7.1 Block Diagram Of Test Setup	12
7.2 Limits	12
7.3 Test Procedure	12
7.4 Test Results	13
8. IMMUNITY TEST OF GENERAL THE PERFORMANCE CRITERIA	15
9. ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD)	16
9.1 Test Specification	16
9.2 Block Diagram of Test Setup	16
9.3 Test Procedure	16
9.4 Test Results	17
10. RADIO FREQUENCY ELECTROMAGNETIC FIELDS (RS)	18
10.1 Test Specification	18
10.2 Block Diagram of Test Setup	18
10.3 Test Procedure	18
10.4 Test Results	18
11. EUT PHOTOGRAPHS	19
12. EUT TEST SETUP PHOTOGRAPHS	22

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
ZHT-20230696744E	Jul. 10, 2023	Original	valid



2. TEST SUMMARY

The Product has been tested according to the following specifications:

EMISSION		
Standard	Test Item	Test result
EN 55014-1	Disturbance voltages(CE)	Pass
EN 55014-1	Discontinuous disturbance (Clicks)	N/A ¹
EN 55014-1	Disturbance power(DP)	N/A ²
EN 55014-1	Magnetic field induced current in a 2m loop antenna(ME)	N/A ³
EN 55014-1	Magnetic field strength	N/A ³
EN 55014-1	Radiated disturbance (RE)	Pass

IMMUNITY (EN 55014-2)		
Standard	Test Item	Test result
IEC 61000-4-2	Electrostatic discharge immunity Test (ESD)	Pass
IEC 61000-4-3	Radio frequency electromagnetic fields(RS)	Pass
IEC 61000-4-4	Fast transients immunity Test (EFT)	N/A ⁴
IEC 61000-4-5	Surges immunity Test	N/A ⁴
IEC 61000-4-6	Injected currents immunity Test (CS)	N/A ⁴
IEC 61000-4-11	Voltage dips and interruptions immunity Test (DIPS)	N/A ⁴

Remark:

1. The Product has no switching operations, automatic programme or other electrically controlled or operated functions
2. The Product shall be evaluated for emissions in the 30 MHz to 1 000 MHz range by testing in accordance with method b as described in clause 4.3.4.2 of EN55014-1.
3. It only apply to induction cooking appliances.
4. The EUT is powered by the DC by USB port, the test item is not applicable.



3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Test item	Value (dB)
Disturbance voltages (150K-30MHZ)	3.20
Disturbance power(DP)	3.70
Radiated disturbance (30MHz-1000MHz)	4.80



4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Ratings: DC 24V from adapter input AC 230V/50Hz

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Data Cable	Power Cord
1.	ADAPTER	UGREEN	CD122	---	---	---

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer’s requirements and conditions for the intended use.

4.4 Test Mode

Test item	Test Mode	Test Voltage
Disturbance voltages(150KHz-30MHz)	Working	DC 24V from adapter input AC 230V/50Hz
Radiated disturbance(30MHz-1GHz)	Working	DC 24V from adapter input AC 230V/50Hz
Electrostatic discharge (ESD) B <input checked="" type="checkbox"/> Air Discharge: ±8kV <input checked="" type="checkbox"/> Contact Discharge: ±4kV <input checked="" type="checkbox"/> HCP & VCP: ±4kV	Working	DC 24V from adapter input AC 230V/50Hz
Radio frequency electromagnetic fields(RS) A 80MHz-1000MHz, 3V/m,80% Front, Rear, Left, Right H/V	Working	DC 24V from adapter input AC 230V/50Hz
All test mode were tested and passed, only Disturbance voltages, Radiated disturbance, shows (*) is the worst case mode which were recorded in this report.		



5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 206, YongFu Buiding, YongFu Road, FuYong, Bao' an District, Shenzhen City, Guangdong P.R. China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

Disturbance voltages and Discontinuous disturbance Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR3	102075	Jun. 13, 2022	Jun.12, 2023
LISN	R&S	ENV216	101375	Jun. 13, 2022	Jun.12, 2023
ISN	HPX	ISN T800	S1509001	Jun. 13, 2022	Jun.12, 2023
Software	Frad	EZ-EMC	EMC-CO N 3A1	\	\

Radiated disturbance Test (966 chamber)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	Jun. 19, 2020	Jun. 18, 2023
Receiver	R&S	ESR3	102075	Jun. 13, 2022	Jun. 12, 2023
Receiver	R&S	ESRP	101154	Jun. 13, 2022	Jun. 12, 2023
Amplifier	Schwarzbeck	BBV9718	9718-309	Jun. 25, 2022	Jun. 24, 2023
Amplifier	Schwarzbeck	BBV9744	9744-0037	Jun. 25, 2022	Jun. 24, 2023
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	VULB9163-942	Jun. 22, 2022	Jun. 21, 2023
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

Electrostatic discharge immunity Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
ESD Tester	KIKISUI	KES4201 A	UH002321	Jul. 12, 2022	Jul. 10, 2023




Radio frequency electromagnetic fieldsTest					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power meter	Keysight	E4419	GB4242144 0	Jun. 17, 2022	Jun. 16, 2023
Power sensor	Keysight	E9300A	US3921130 5	Jun. 17, 2022	Jun. 16, 2023
Power sensor	Keysight	E9300A	US3921165 9	Jun. 17, 2022	Jun. 16, 2023
Amplifier	SKET	HAP-8010 00M-250W	\	Jun. 25, 2022	Jun. 24, 2023
Amplifier	SKET	HAP-8010 00M-75W	\	Jun. 25, 2022	Jun. 24, 2023
Amplifier	SKET	HAP-8010 00M-50W	\	Jun. 25, 2022	Jun. 24, 2023
Stacked double Log.-Per. Antenna	Schwarzbeck	STLP 9129	077	\	\
Field Probe	Narda	EP-601	80256	Jul. 07, 2022	Jul. 06, 2023
Signal Generator	Agilent	N5181A	MY5014374 8	Jun. 13, 2022	Jun. 12, 2023
Software	SKET	EMC-S	1.2.0.18	\	\

6. DISTURBANCE VOLTAGES

6.1 Block Diagram Of Test Setup

For mains ports:

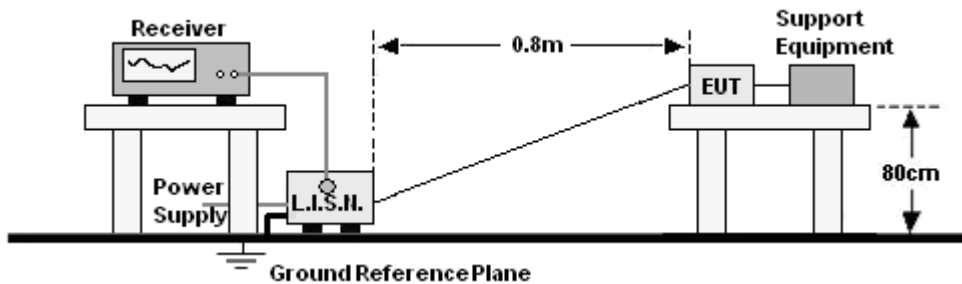

6.2 Limit

At mains ports Limits for Household Appliance

Frequency (MHz)	Limits dB(mV)	
	Quasi-peak	Average
0,15 ~ 0,50	66 ~ 56*	59 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

6.3 Test procedure


For mains ports:

- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.



6.4 Test Result


Temperature:	26 °C	Relative Humidity:	54 %
Pressure:	101kPa	Phase :	Line
Test Voltage :	DC 24V from adapter input AC 230V/50Hz	Test Mode:	Working

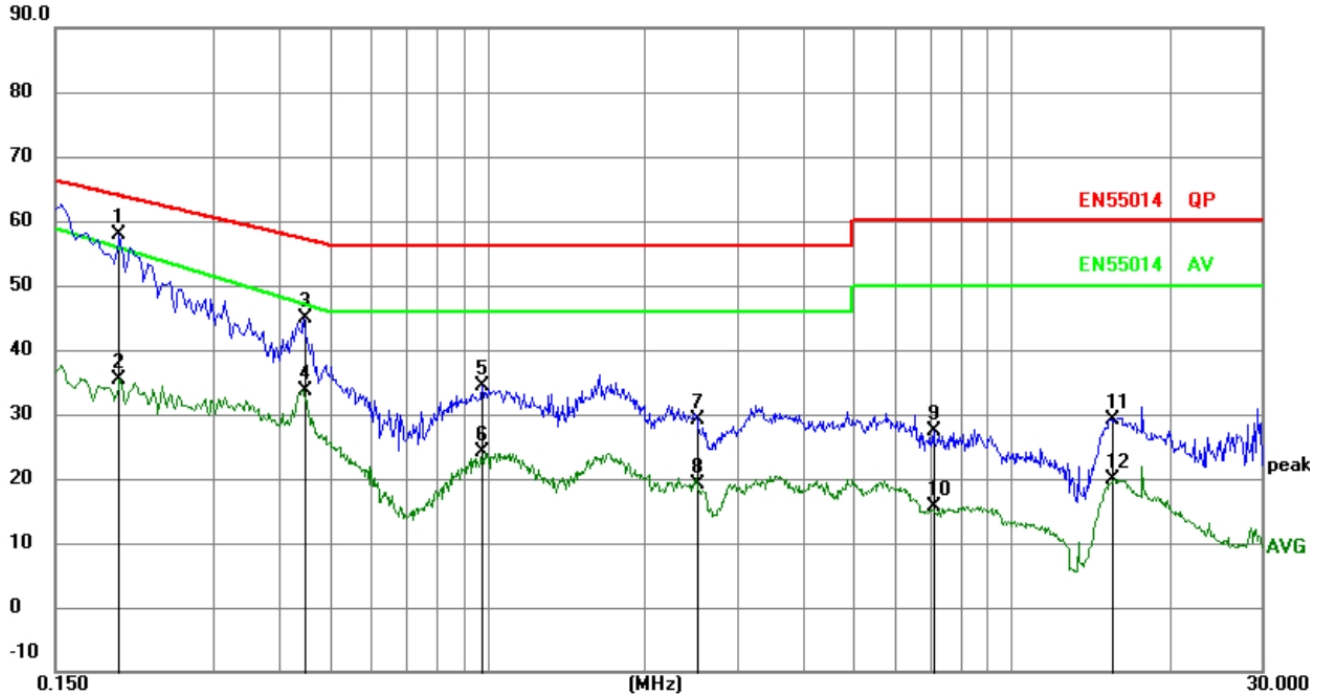

No.	Mk.	Freq. MHz	Reading Level dB	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1986	38.18	19.60	57.78	63.67	-5.89	QP	
2		0.1986	15.82	19.60	35.42	55.97	-20.55	AVG	
3		0.4468	25.23	19.61	44.84	56.93	-12.09	QP	
4		0.4468	14.01	19.61	33.62	47.21	-13.59	AVG	
5		0.9787	14.75	19.62	34.37	56.00	-21.63	QP	
6		0.9787	4.48	19.62	24.10	46.00	-21.90	AVG	
7		2.5133	9.48	19.63	29.11	56.00	-26.89	QP	
8		2.5133	-0.42	19.63	19.21	46.00	-26.79	AVG	
9		7.0997	7.75	19.73	27.48	60.00	-32.52	QP	
10		7.0997	-4.10	19.73	15.63	50.00	-34.37	AVG	
11		15.4701	9.43	19.77	29.20	60.00	-30.80	QP	
12		15.4701	0.16	19.77	19.93	50.00	-30.07	AVG	



Temperature:	26 °C	Relative Humidity:	54 %
Pressure:	101kPa	Phase :	Neutral
Test Voltage :	DC 24V from adapter input AC 230V/50Hz	Test Mode:	Working

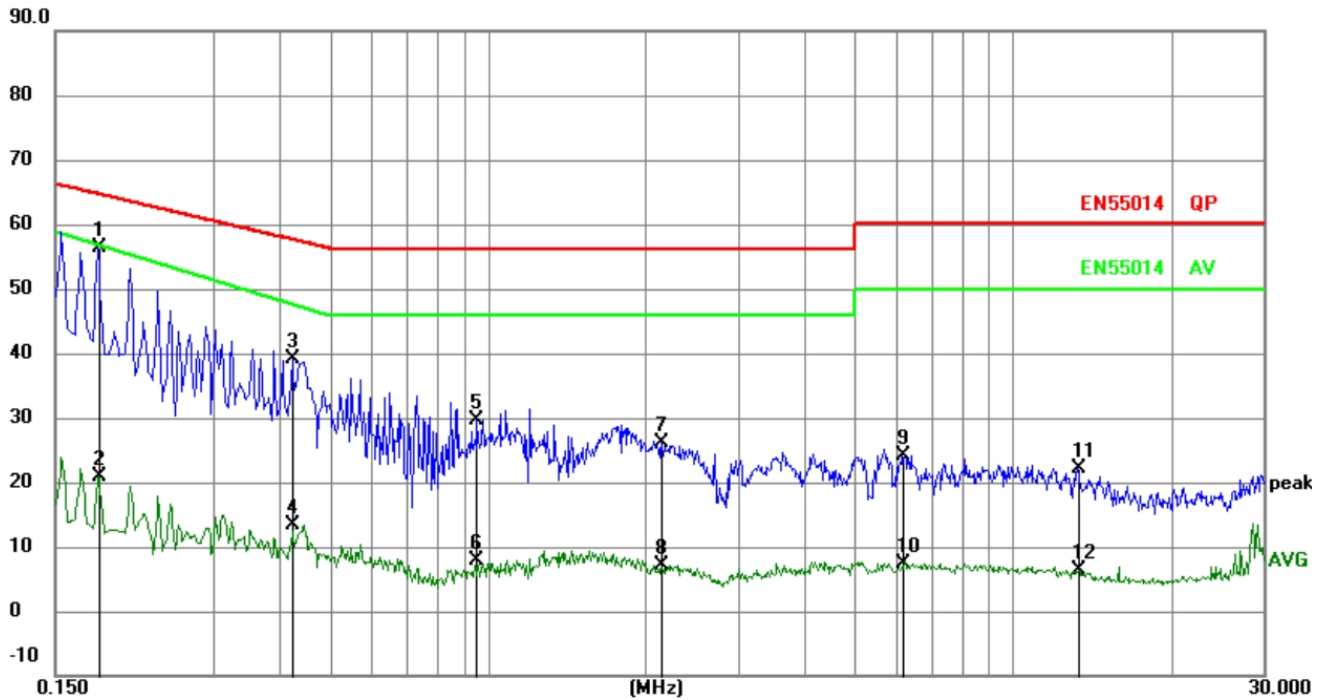


No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1806	36.74	19.60	56.34	64.46	-8.12	QP	
2		0.1806	1.24	19.60	20.84	57.00	-36.16	AVG	
3		0.4237	19.62	19.61	39.23	57.38	-18.15	QP	
4		0.4237	-6.18	19.61	13.43	47.79	-34.36	AVG	
5		0.9531	10.11	19.62	29.73	56.00	-26.27	QP	
6		0.9531	-11.69	19.62	7.93	46.00	-38.07	AVG	
7		2.1439	6.41	19.62	26.03	56.00	-29.97	QP	
8		2.1439	-12.54	19.62	7.08	46.00	-38.92	AVG	
9		6.1534	4.47	19.72	24.19	60.00	-35.81	QP	
10		6.1534	-12.36	19.72	7.36	50.00	-42.64	AVG	
11		13.2667	2.26	19.78	22.04	60.00	-37.96	QP	
12		13.2667	-13.32	19.78	6.46	50.00	-43.54	AVG	

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

7. RADIATED DISTURBANCE TEST

7.1 Block Diagram Of Test Setup

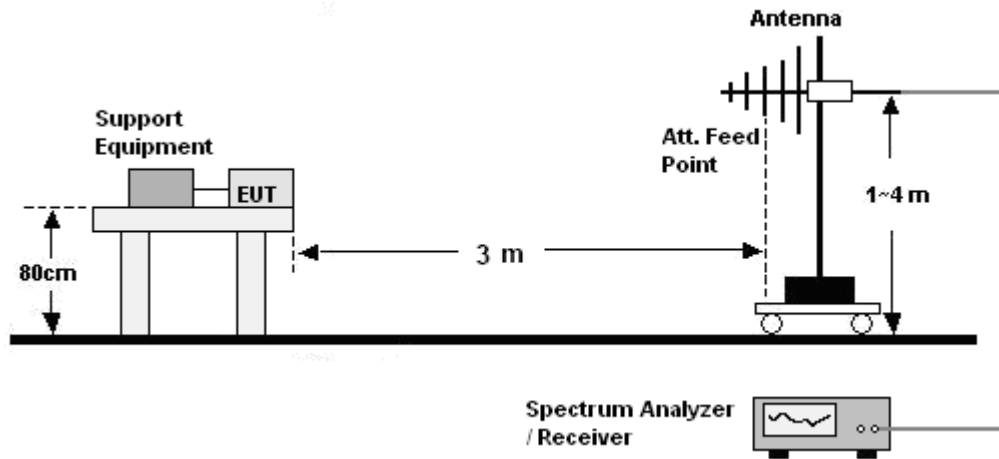

7.2 Limits

Frequency (MHz)	Quasi-peak limits at 3m dB(μ V/m)
30-230	40
230-1000	47

Note: The lower limit shall apply at the transition frequencies.


7.3 Test Procedure

- The Product was placed on the nonconductive turntable 0.8 m above the ground at a chamber.
- Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 120 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.



7.4 Test Results


Temperature:	26 °C	Relative Humidity:	54 %
Pressure:	101kPa	Phase :	Horizontal
Test Voltage :	DC 24V from adapter input AC 230V/50Hz	Test Mode:	Working

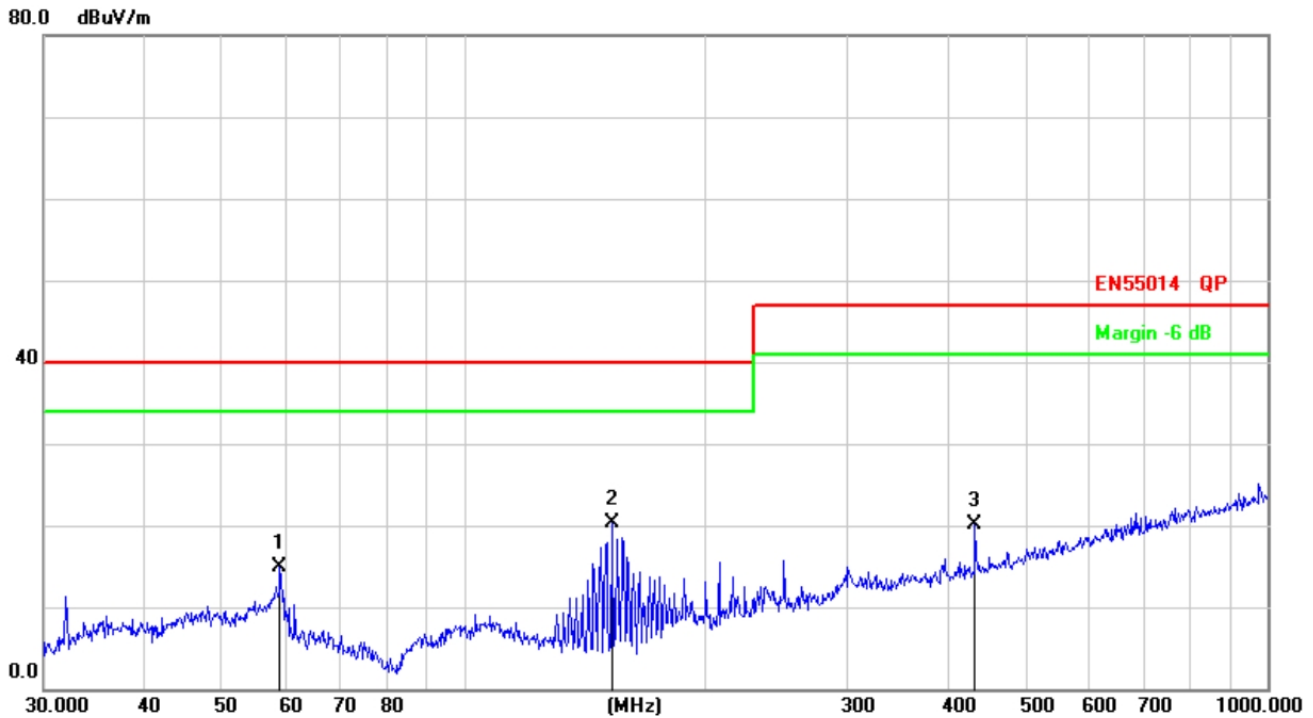

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		59.0251	31.49	-16.57	14.92	40.00	-25.08	peak		
2	*	152.6641	39.99	-19.65	20.34	40.00	-19.66	peak		
3		432.5457	29.71	-9.54	20.17	47.00	-26.83	peak		



Temperature:	26 °C	Relative Humidity:	54 %
Pressure:	101kPa	Phase :	Vertical
Test Voltage :	DC 24V from adapter input AC 230V/50Hz	Test Mode:	Working

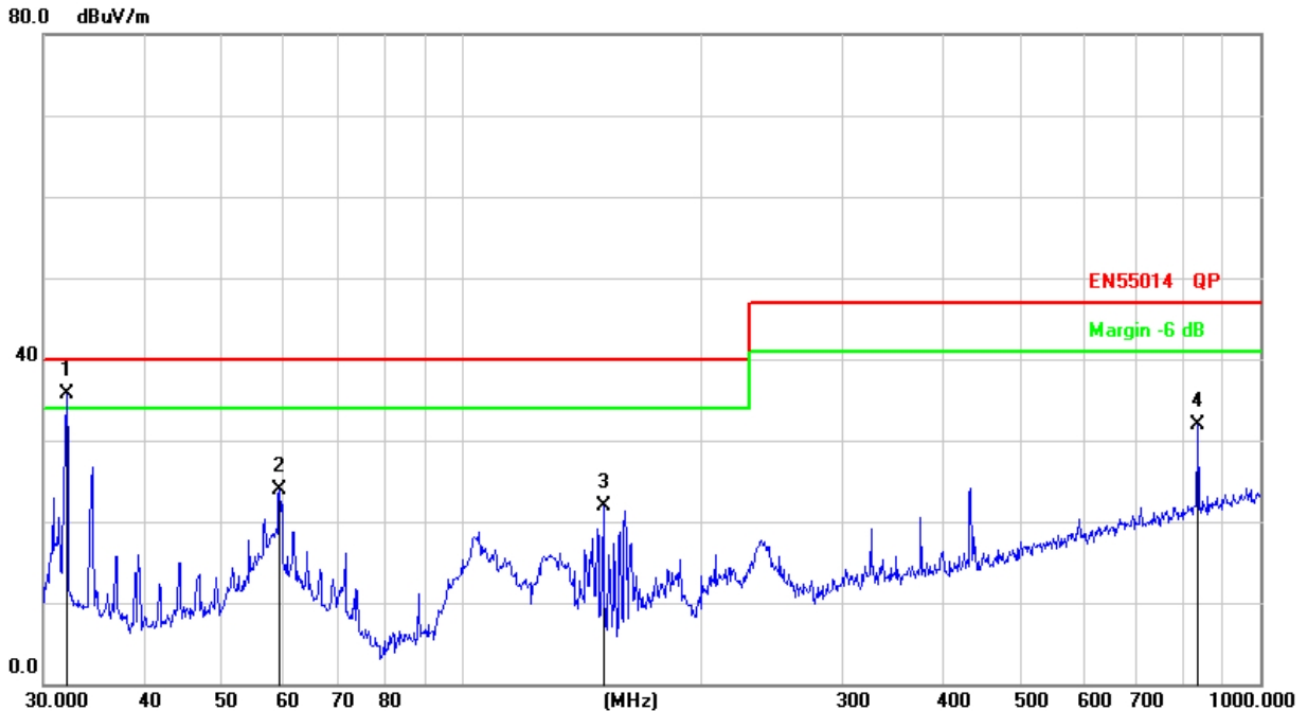

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	32.0667	53.57	-17.77	35.80	40.00	-4.20	peak		
2		59.2325	40.46	-16.60	23.86	40.00	-16.14	peak		
3		150.5378	41.81	-19.82	21.99	40.00	-18.01	peak		
4		836.2443	33.77	-1.89	31.88	47.00	-15.12	peak		

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



8. IMMUNITY TEST OF GENERAL THE PERFORMANCE CRITERIA


Product Standard	EN 55014-2:2015
CRITERION A	The apparatus shall continue to operate as intended during the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended
CRITERION B	The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended. During the test, degradation of performance is allowed, however, no change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended.
CRITERION C	Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls, or by any operation specified in the instructions for use.

9. ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD)

9.1 Test Specification

Test Port	: Enclosure port
Discharge Impedance	: 330 ohm / 150 pF
Discharge Mode	: Single Discharge
Discharge Period	: one second between each discharge

9.2 Block Diagram of Test Setup

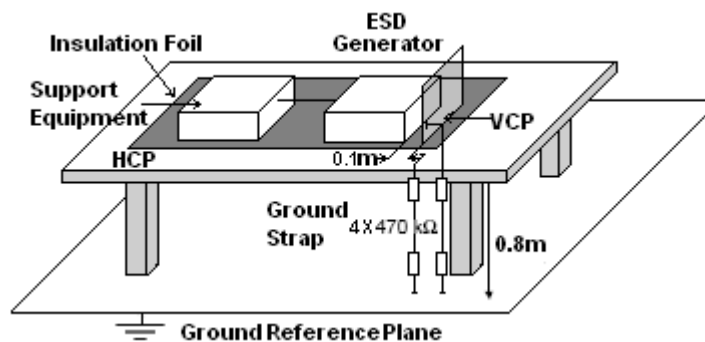

9.3 Test Procedure

- Electrostatic discharges were applied only to those points and surfaces of the Product that are accessible to users during normal operation.
- The test was performed with at least ten single discharges on the pre-selected points in the most sensitive polarity.
- The time interval between two successive single discharges was at least 1 second.
- The ESD generator was held perpendicularly to the surface to which the discharge was applied and the return cable was at least 0.2 meters from the Product.
- Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
- Air discharges were applied with the round discharge tip of the discharge electrode approaching the Product as fast as possible (without causing mechanical damage) to touch the Product. After each discharge, the ESD generator was removed from the Product and re-triggered for a new single discharge. The test was repeated until all discharges were complete.
- At least ten single discharges (in the most sensitive polarity) were applied to the Horizontal Coupling Plane at points on each side of the Product. The ESD generator was positioned vertically at a distance of 0.1 meters from the Product with the discharge electrode touching the HCP.



h. At least ten single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the Vertical Coupling Plane in sufficiently different positions that the four faces of the Product were completely illuminated. The VCP (dimensions 0.5m x 0.5m) was placed vertically to and 0.1 meters from the Product.

9.4 Test Results

Temperature:	26 °C	Relative Humidity:	54 %
Pressure:	101kPa	Test Mode:	Working
Test Voltage :	DC 24V from adapter input AC 230V/50Hz		


Discharge Method	Discharge Position	Voltage (±kV)	Min. No. of Discharge per polarity (Each Point)	Required Level	Performance Criterion
Contact Discharge	Conductive Surfaces	4	10	B	A
	Indirect Discharge HCP	4	10	B	A
	Indirect Discharge VCP	4	10	B	A
Air Discharge	Slots, Apertures, and Insulating Surfaces	8	10	B	A
Note: N/A					

10. RADIO FREQUENCY ELECTROMAGNETIC FIELDS (RS)

10.1 Test Specification

Test Port	: Enclosure port
Step Size	: 1%
Modulation	: 1kHz, 80% AM
Dwell Time	: 1 second
Polarization	: Horizontal & Vertical

10.2 Block Diagram of Test Setup

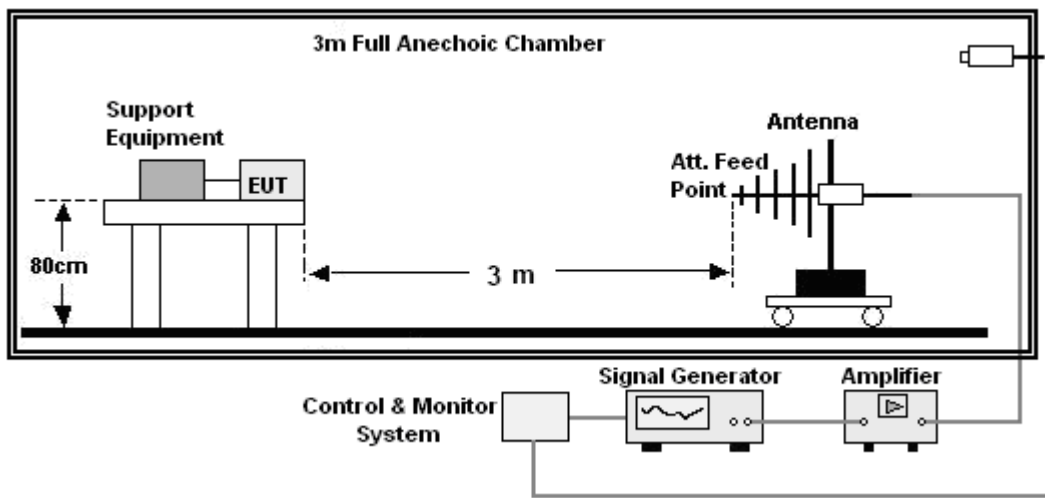

10.3 Test Procedure

- The testing was performed in a fully-anechoic chamber. The transmit antenna was located at a distance of 3 meters from the Product.
- The frequency range is swept from 80MHz to 1000MHz, with the signal 80% amplitude modulated with a 1 kHz sine wave, and the step size was 1%.
- The test was performed with the Product exposed to both vertically and horizontally polarized fields on each of the four sides.

10.4 Test Results

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Test Mode:	Working
Test Voltage :	DC 24V from adapter input AC 230V/50Hz		

Frequency	Position	Field Strength (V/m)	Required Level	Performance Criterion
80 - 1000MHz	Front, Right, Back, Left	3	A	A

Note: N/A



11. EUT PHOTOGRAPHS


EUT Photo 1




EUT Photo 2



EUT Photo 3

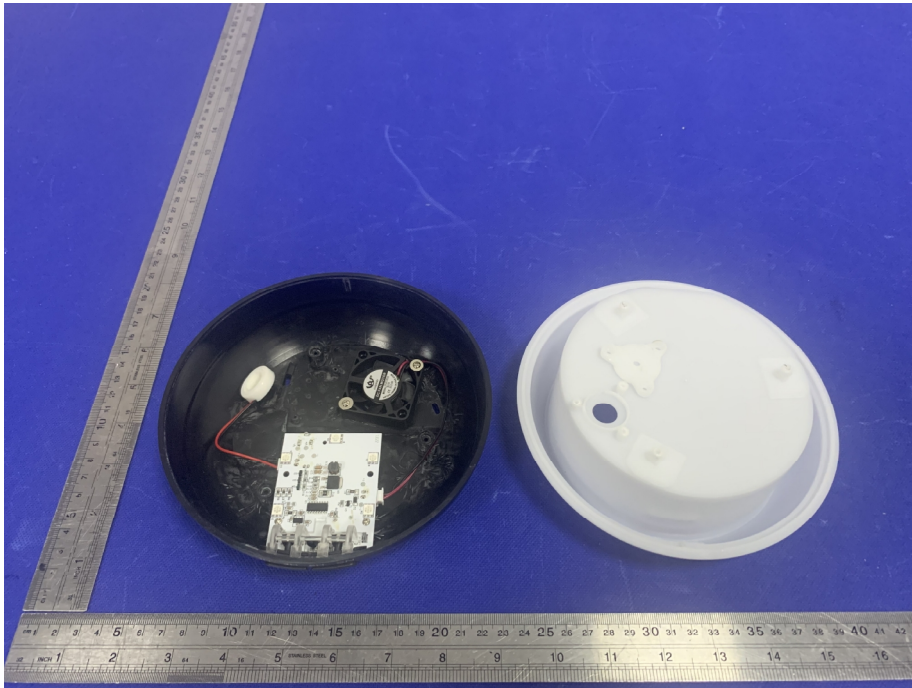


EUT Photo 4

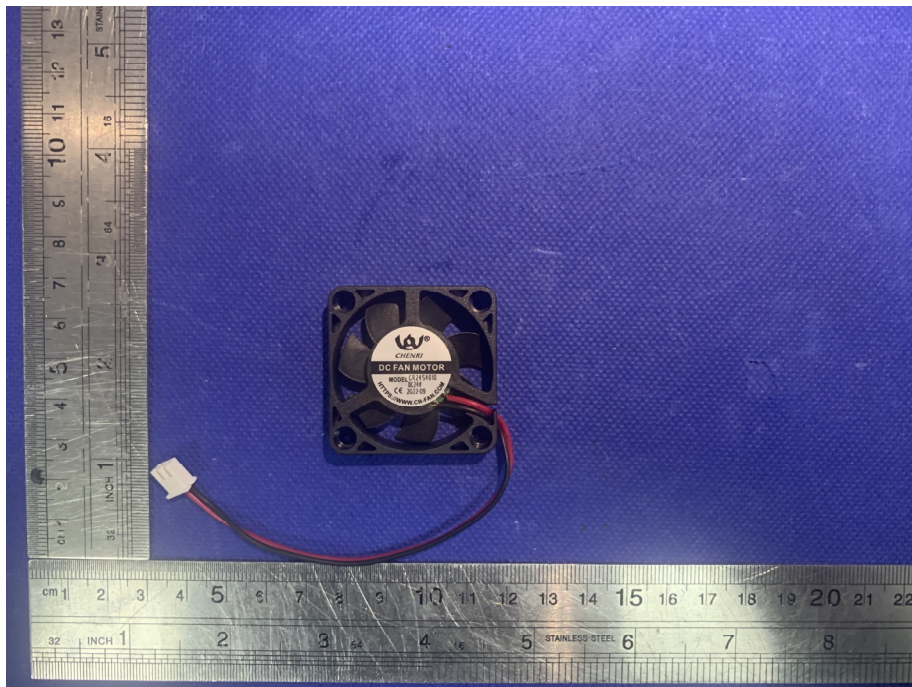




EUT Photo 5

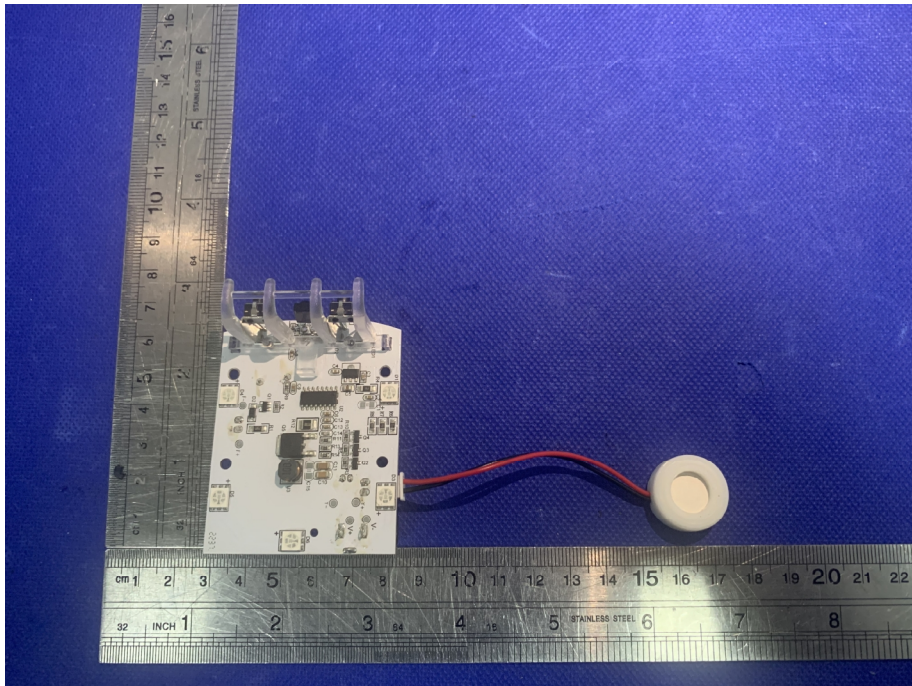


EUT Photo 6

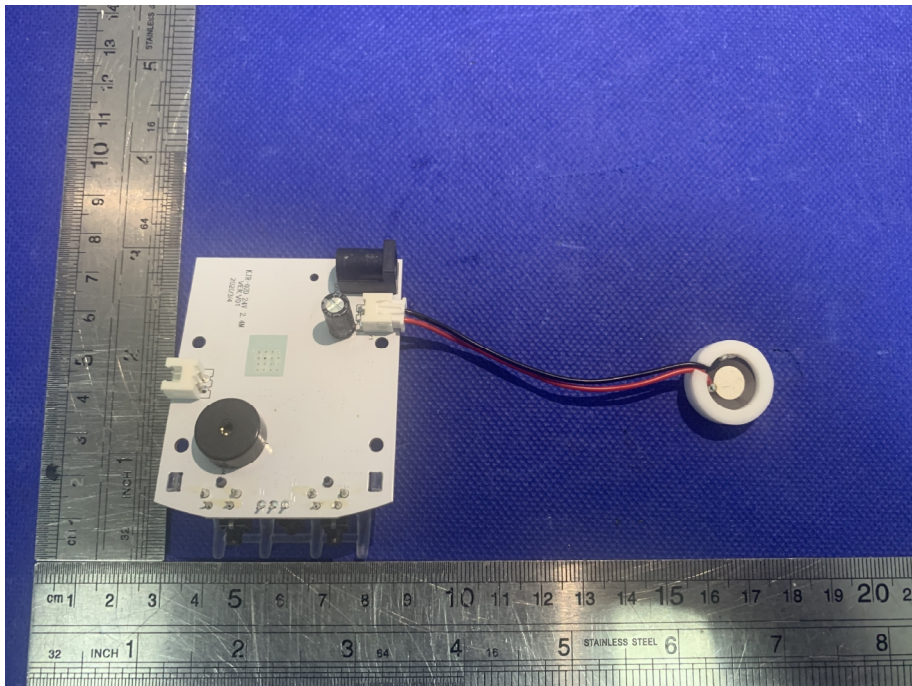




12. EUT TEST SETUP PHOTOGRAPHS

Conducted emission

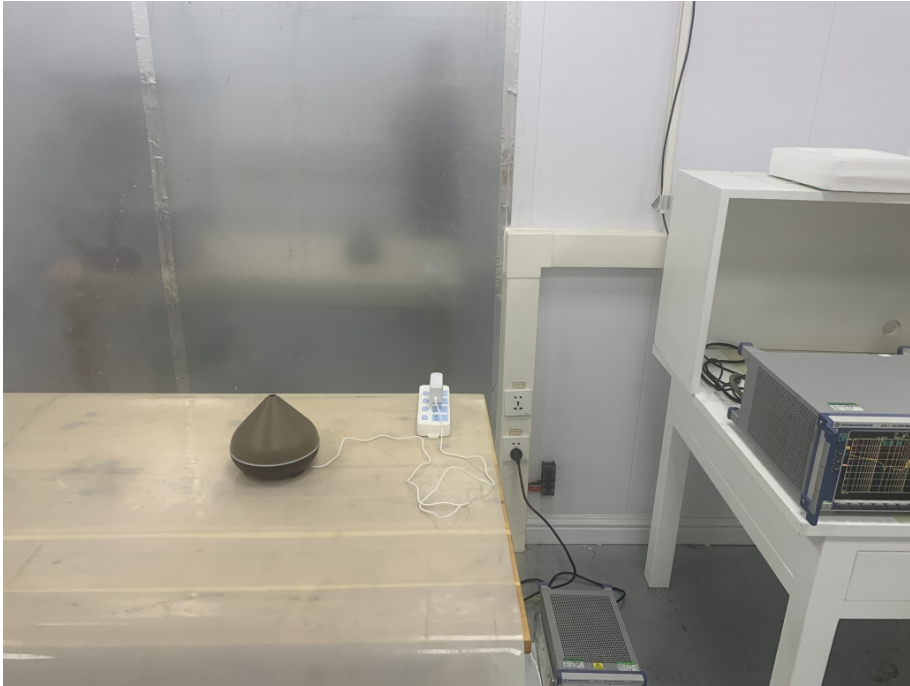

Radiated emission

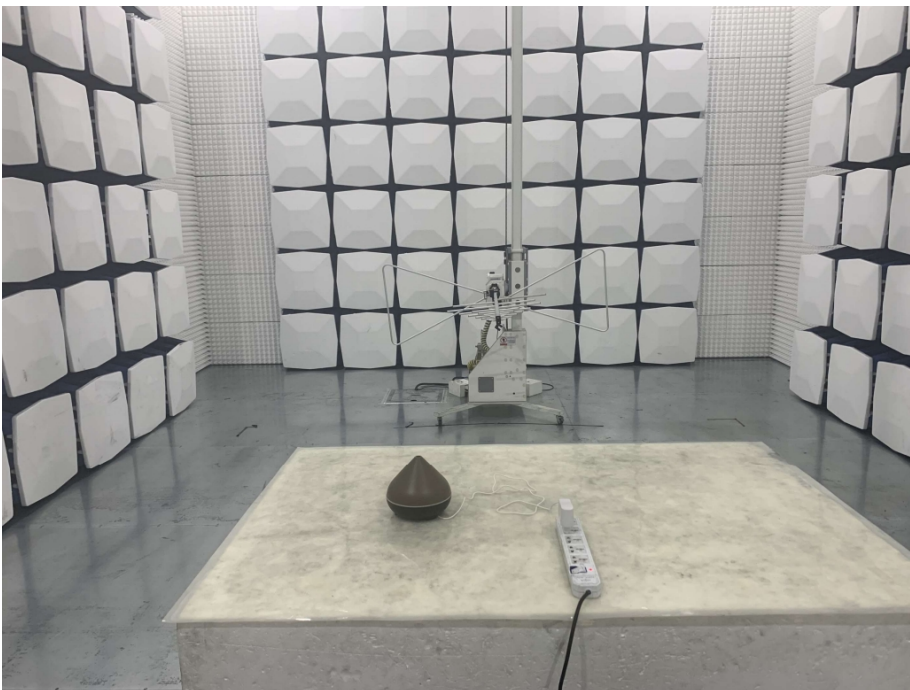



ESD



RS



***** END OF REPORT *****