




## Anhui Fland Refrigeration Equipments Co., Ltd QUOTATION LIST

Buyer:  
Address:  
Contact:  
Mob:  
Email:

From: Wincy Meng(Fland)  
Mob: +8617826442940  
Email: mengwincy@gmail.com

### Cold storages or storage and preservation

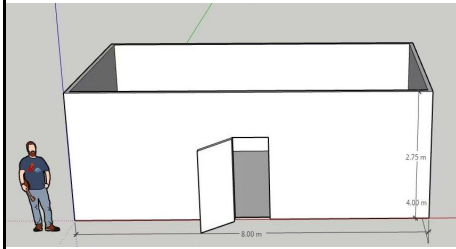

Cold Room External Size:  
L8m\*W4m\*H2.75m  
Temperature:  
①-25℃~0℃;  
Storage Goods: meats  
Country / Location: Saudi jeddah Port  
Voltage: 380V/50hz/3phase









No.	Item	Size	Qty		Price(USD)
1	Whole set cold room	L8m*W4m*H2.75m	1	set	6474
2	Shipping price to Saudi jeddah Port		1	set	741.5
<b>Total price(CIF price)</b>					<b>7215.5</b>

\*Quotation including all parts & accessories that forming a cold room: PU panels, condensing units, Electric control box, air cooler, accessories etc.)  
Not including R404a refrigerant

- 1.Payment Term:** 50% advance payment, 50% final payment by T/T.
- 2.Currency:** USD
- 3.Lead time:** 40 days after receive the payment, video/picture confirm before loading.
- 4.Warranty:** 1 year (Non destruction from human factor and uncontrollable nature). Provide professional technical guidance all the time.
- 5.Final shipping will be charged at actual
- 6.This product is a customized product, and once production starts, there will be no refunds**

#### Specification Sheet (for one set) Cold Room External Size(L\*W\*H): L8m\*W4m\*H2.75m

No.	Description of Goods	Photo	UNIT	QTY	Unit price (USD)	Amount (USD)
<b>A: Insulation Part</b>						
1	<b>Cold Room Panel</b> ▶Polyurethane panel tough groove dry joint with cam lock. ▶Thickness:120mm, with 0.326mm thickness of Galvanized steel. ▶Density: 42±2kg/m³ ▶Plastic protective film can be teared off, the base color is white		m²	130	17	2210
2	<b>Cold room door</b> ▶Hinged door ,open to the right ▶Hand pull door with escape device ▶Size: 0.8m (width) * 1.8m (height) ▶Thickness: 100mm ▶Fittings: Door panel, door heaters, hinges, locks (pre-assembled before shipping)		set	1	174	174
3	<b>3mm single-sided non-slip aluminum plate</b>		set	32	40	1280
4	<b>PU Panel Sealant(Glue)</b> ▶To seal the crack between the panels Sealants, seals, retainers, foaming agents, etc.		set	1	120	120

5	LED lamp ▶Low temperature resistance and long life ▶Silicone closed, waterproof, moisture-proof ▶Anti-explosion ,10w, IP65 Grade		set	2	13	26
6	Pressure balance window ▶To keep inside/outside pressure to be balanceable		set	1	18	18
<b>B : Refrigeration systems</b>						
1	<b>Condensing unit</b> ▶Compressor Brand :Fland ▶Horsepower:8HP ▶Voltage:380V/50hz/3phase ▶Refrigerant: R404a refrigerant (No prefilling)		set	1	1563	1563
2	<b>Evaporator</b> ▶Type: DD-80 ▶Voltage: 380V/50hz/3phase ▶The shell is made of quality steel plate: Corrosion resistant, good defrosting effect		set	1	706	706
3	<b>Electric Panel:</b> ▶Micro Computer Temperature Controller ▶Intelligent Motor Protector		set	1	224	377
4	<b>Expansion valve</b> Expansion valve, pressure regulating valve, filter drier ▶Danfoss brand		set	1	116	
5	<b>Pipe connectors, miscellaneous hardware and installation accessories</b>		set	1	160	
6	<b>Copper pipe:5m</b> Insulation pipe:5m power line:4mm <sup>2</sup>		set	1	290	
<b>Total price (USD)</b>			<b>6474</b>			